



I-7520/I-7520A I-7520R/I-7520AR

I-7520: Isolated RS-232 to RS-485 Converter
 I-7520A: Isolated RS-232 to RS-422/485 Converter
 I-7520R: RS-232 to Isolated RS-485 Converter
 I-7520AR: RS-232 to Isolated RS-422/485 Converter

Features

- Auto Switching Baud Rate, 300–115200 bps
- 3000 V_{DC} Isolation Protection on the RS-485 side
- ESD Protection for the RS-232/422/485 Data Line
- Transmission Speed of up to 115200 bps
- Power Input of +10 – +30 V_{DC}
- Supports Operating Temperatures from -25 °C – +75 °C
- DIN-Rail



Introduction


Most industrial computer systems provide standard RS-232 serial ports. Though widely accepted, RS-232 has limited transmission speed, range, and networking capabilities. The RS-422 and RS-485 standards overcome these limitations by using differential voltage lines for data and control signals, which transparently converts RS-232 signals into isolated RS-422 or RS-485 signal with no need to change any hardware or software. The I-7520/I-7520A lets you easily build an industrial grade, long-distance communication system using standard PC hardware.

The design of the isolation between the I-7520 and the I-7520R/AR is different. If the user wants to supply power from the PLC/PC, the I-7520R/AR should be used, otherwise the isolation will be broken. Refer to the I-7000 bus converter manual for detailed information.

Specifications

Models	I-7520	I-7520R	I-7520A	I-7520AR
Interface				
Serial Interface	RS-232	TxD, RxD, GND		
	RS-422	-		TxD+, TxD-, RxD+, RxD-
	RS-485	Data+, Data-		The RS-422 and RS-485 cannot be used simultaneously
2-wire Cabling/4-wire Cabling	Belden 8941 (2P twisted-pair cable)/Belden 8942 (4P twisted-pair cable), if different cables are used, the transmission distance may change			
Transfer Distance	Max. 1,200 m for at speed 9.6 kbps; Max. 400 m at 115.2 kbps			
Max. Devices Supported	256 (Without repeater)			
Self-Tuner ASIC Inside	Yes			
Speed	300 – 115200 bps			
ESD Protection	Yes			
3000 V _{DC} Isolated Voltage	On RS-232 side	On RS-485 side	On RS-232 side	On RS-485 side
Connection	RS-232	9-Pin Female D-Sub		
	RS-422/485	Removable 10-Pin Terminal Block		
LED Indicators				
Power/Communication	Yes			
Power				
Input Voltage Range	+10 V _{DC} – +30 V _{DC} (Non-isolated)			
Power Consumption	1.2 W			
Mechanical				
Casing	Plastic			
Flammability	Fire Retardant Materials (UL94-V0 Level)			
Dimensions (W x H x D)	72 mm x 118 mm x 35 mm			
Installation	DIN-Rail			
Environment				
Operating Temperature	-25 °C – +75 °C			
Storage Temperature	-30 °C – +75 °C			
Humidity	10 – 90% RH, non-condensing			

Applications

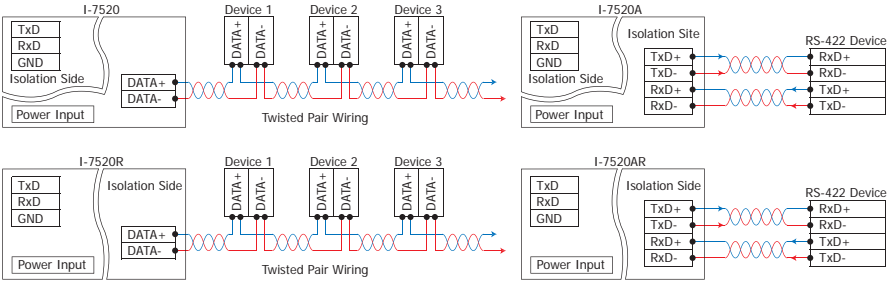


Pin Assignments

I-7520/I-7520R				
Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
RS-485	01 DATA+		05	09 --
	02 DATA-		04	08 --
	03 --		03	07 --
	04 --		02	06 --
	05 --		01	01 --
	06 --			
	07 --			
	08 --			
	09 (R)+Vs			
	10 (B)GND			



I-7520A/I-7520AR				
Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
RS-485	01 DATA1+		05	09 --
	02 DATA1-		04	08 --
	03 --		03	07 --
	04 TxD+		02	06 --
RS-422/485	05 TxD-		01	01 --
	06 RxD+/DATA2+			
	07 RxD-/DATA2-			
	08 --			
	09 (R)+Vs			
	10 (B)GND			

Dimensions (Unit: mm)

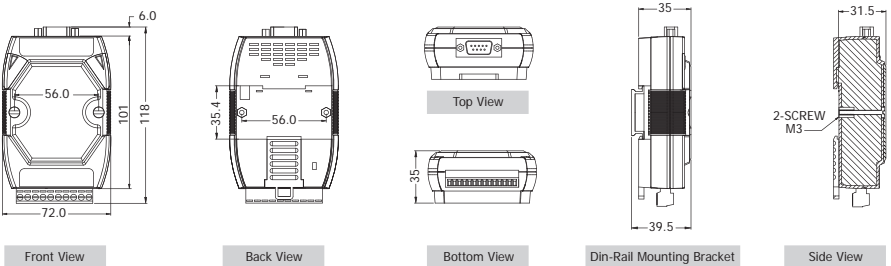

Ordering Information

I-7520 CR	Isolated RS-232 to RS-485 Converter (RoHS)
I-7520A CR	Isolated RS-232 to RS-422/485 Converter (RoHS)
I-7520-G CR	Isolated RS-232 to RS-485 Converter (Gray Cover) (RoHS)
I-7520A-G CR	Isolated RS-232 to RS-422/485 Converter (Gray Cover) (RoHS)
I-7520R CR	RS-232 to Isolated RS-485 Converter (RoHS)
I-7520AR CR	RS-232 to Isolated RS-422/485 Converter (RoHS)
I-7520R-G CR	RS-232 to Isolated RS-485 Converter (Gray Cover) (RoHS)
I-7520AR-G CR	RS-232 to Isolated RS-422/485 Converter (Gray Cover) (RoHS)

Accessories

GPSU06U-6	24 V _{DC} /0.25 A, 6 W Power Supply
DIN-KA52F	24 V _{DC} /1.04 A, 25 W Power Supply with Din-Rail Mounting
I-7510 CR	Isolated RS-485 Repeater (RoHS)
I-7510A CR	Isolated RS-422/485 Repeater (RoHS)
CA-0915	9-Pin Male-Female D-Sub Cable, 1.5 m